



Linear Light Gen1

Linkable Up & Down Lights

Model: SL1LL-abbccWdffK-fgg


LEDLightingCanada[®] Gen1 Linear light is modern aesthetic design light with variety of up and down light distribution, 120-277V/120-347V, non-dimming and dimming available. It is linkable and come with finish in White, Black.

The aesthetic style and double side illuminating, together with occupancy, motion and daylight sensor makes its ideal for applications such as office, conference rooms, common spaces, retail lighting, and other lighting demand scenario with power saving to 80%.



Key Features

- 4FT Power 40-60W;
- 110-277VAC and 120-347Vac Dimmable;
- Down, Up & Down Light;
- Lights Linkable for aesthetic setup;
- Option Daylight Sensor, Motion Sensor with power saving to 80%;
- cETLus and DLC Certified;

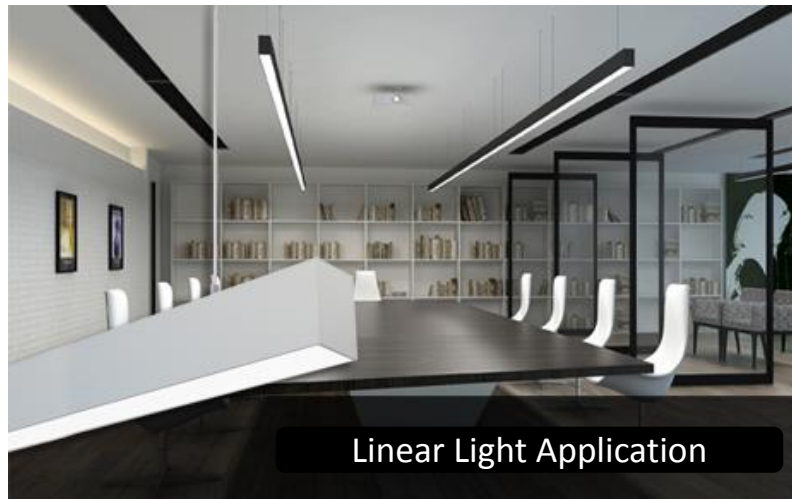

Ordering Guide Example SL1LL-41030WH40K-DBK

SL1	LL	a	bbccW	d	eeK	f	g
Gen1	Linear Light	4-4FT (2FT 8FT on request)	0040W / 1030W (U-0 D-40W/U-10 D-30) 0060W / 2040W (U-0 D-60W/U-20 D-40)	U:120-277 H: 120-347	30-3000K 40-4000K 50-5000K	D = Dimmable N = No Dim	WH-White BK=Black



Flood Light Gen1- Specification and Parameters

Model No.	SL1LL-4bbccWdeeK-fgg	SL1LL-4bbccWdeeK-fgg
Type	Linkable 4FT Up and Down Linear Light	
Power	0040W (Up-0W/Down-40W) 1030W (Up-10W/Down30W)	0060W (Up-0W/Down-40W) 2040W (Up-10W/Down30W)
Voltage	d: U=110-277Vac; H=120-347Vac	
PF	0.95	
Lumen lm	105lm/Watt	
CCT	ee: 3000K/4000K/5000K	
CRI	83+	
Beam	120D	
Dimming	f: Dimmable, Non-Dimming, Motion Sensor Option	
Housing	Aluminum Alloy Body. PC Cover	
IP Level	IP40 Damp Location	
Mounting	Suspending Connectable, gg: WHITE, BLACK	
Size HWD Inch	1193x84x74	
Lifetime (Hrs)	50,000Hrs	
Environment	-10°C to 40°C	
Certification	cETLus DLC	

Product Dimension (mm)

